

TEST NAME
LOCKE PROCOM TEST STK MAP003

MAX POWER


MAX TORQUE
59.51 / 4585

TEMP
69.0 °C

Humidity %
70 %

Pressure
29.5 inHg

Date/Time
2/5/2011 1:22:15 PM

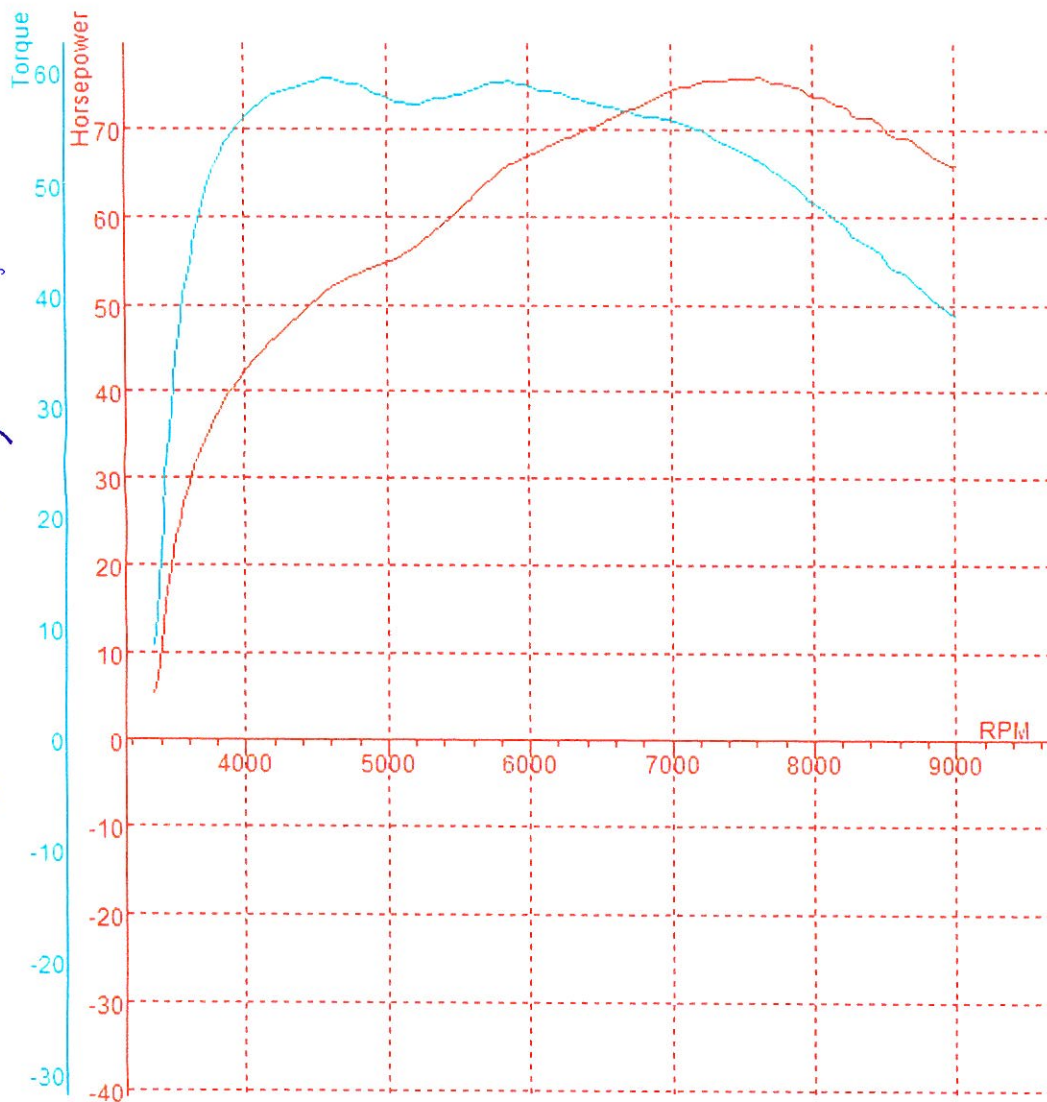

DATA FOR TEST: LOCKE PROCOM TEST STK MAP003

RPM	HP (HP)	TQ (FT*LB)	LAMBDA 1
3500	23.1	34.68	140.39
3750	36.0	50.61	204.88
4000	42.7	56.13	227.24
4250	47.1	58.22	235.67
4500	50.8	59.27	239.92
4585	51.8	59.51	240.92
4750	53.2	58.87	238.30
5000	54.8	57.64	233.35
5250	57.4	57.34	232.13
5500	60.9	58.04	234.95
5750	64.7	59.02	238.91
6000	67.1	58.65	237.41
6250	68.9	57.90	234.41
6500	70.7	56.99	230.69
6750	72.3	56.24	227.69
7000	74.4	55.73	225.59
7250	75.6	54.61	221.08
7500	75.7	52.94	214.33
7619	75.9	52.22	211.39
7750	75.3	50.92	206.13
8000	73.8	48.25	195.33
8250	72.3	45.86	185.67
8500	70.2	43.26	175.14
8750	67.9	40.58	164.28
9000	65.8	38.29	155.02

LOSSES: 0.0 HP 0.0FT*LB
TOTAL ENGINE: 75.9HP 59.51FT*LB